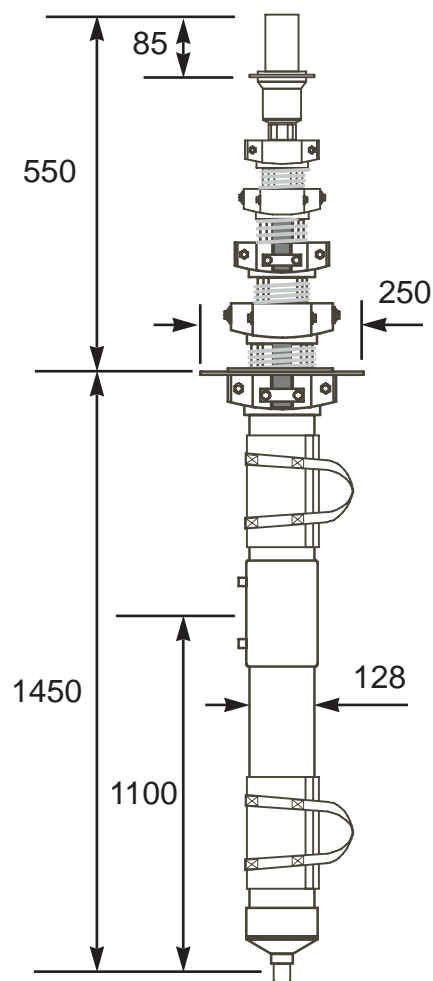
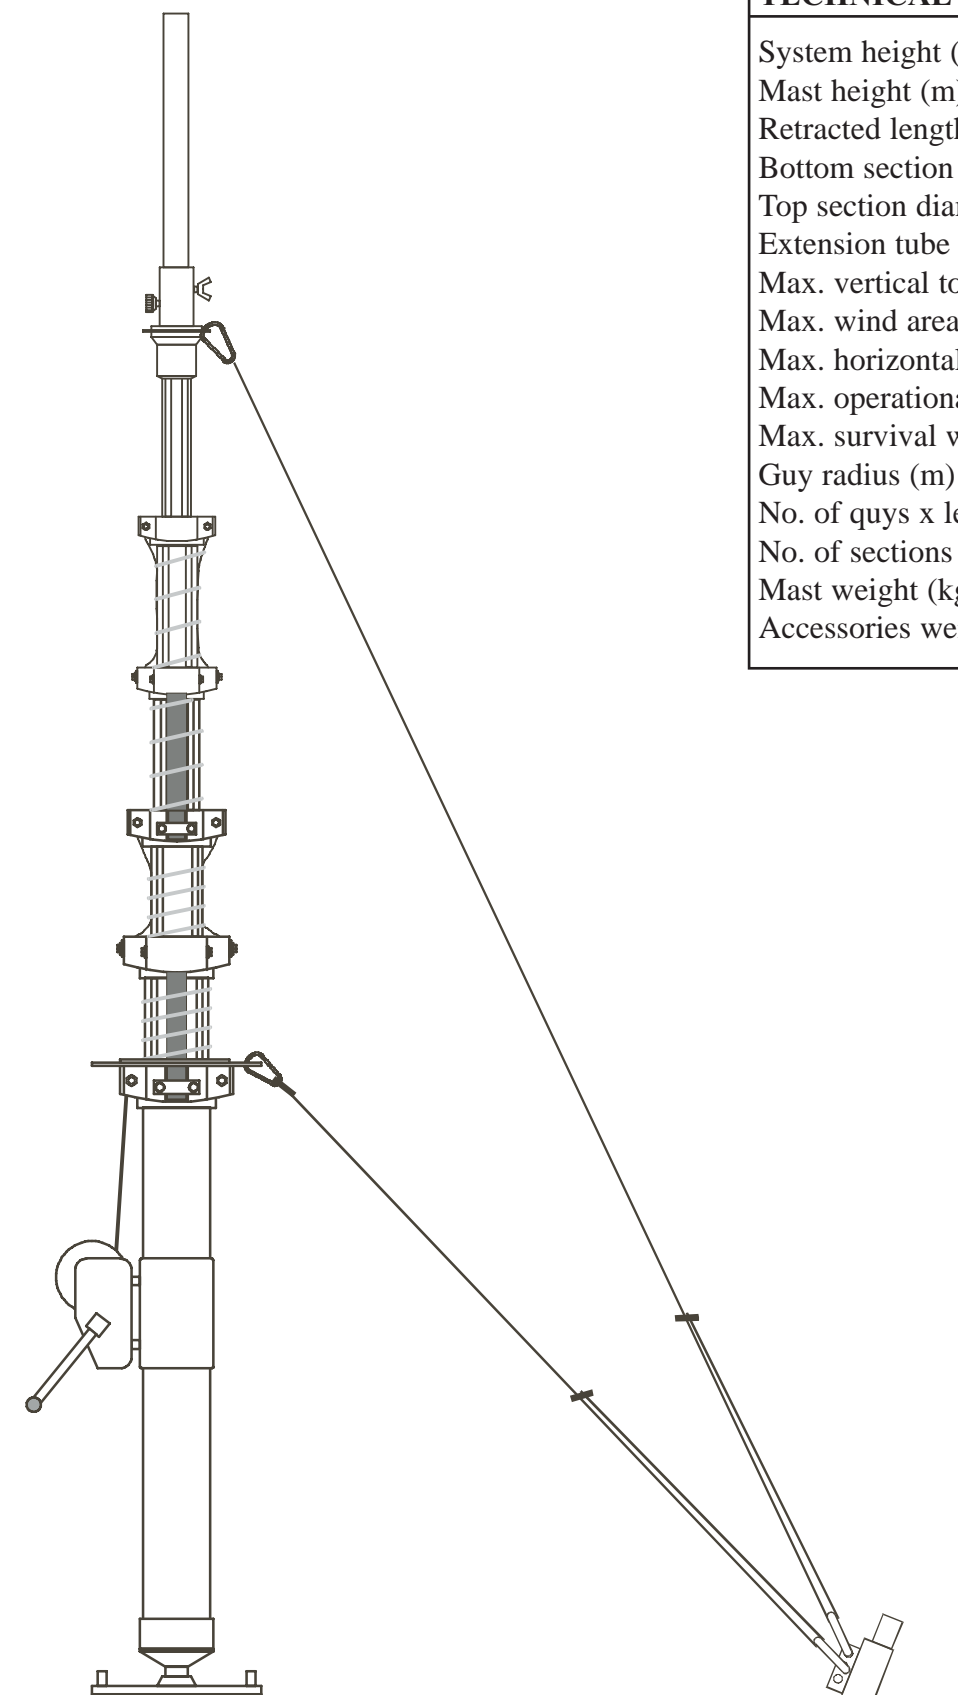
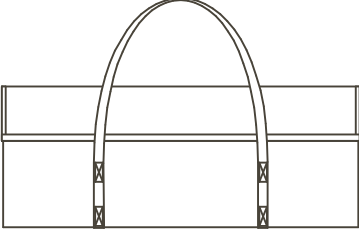











TECHNICAL SPECIFICATIONS	
System height (m)	8
Mast height (m)	7.5
Retracted length (m)	2.0
Bottom section diam. (mm)	128
Top section diam. (mm)	71.5
Extension tube length (mm)	500
Max. vertical top load (kg)	35
Max. wind area CxA (m ²)	0.80
Max. horizontal top load (N)	570
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	7
No. of guys x levels	4 x 2
No. of sections	6
Mast weight (kg)	24.5
Accessories weight (kg)	27.5



STV-8/128 - ACCESSORIES - TECHNICAL SPECIFICATION

	DESCRIPTION	QTY.	WEIGHT (kg)
	<p>BAG - Linen bag for the accessories</p>	<p>1</p>	<p>1.5</p>
	<p>GUY ANCHOR 650 - Anchor for guying ropes, made of special hardened steel, zined and black pasivated</p>	<p>4</p>	<p>1.6</p>
	<p>EYEBAR - Sidebar for fixing the mast, made of steel, zined and black pasivated</p>	<p>1</p>	<p>0.3</p>
	<p>BASE PLATE ANCHOR - for fixing the base plate and eyebar, made of steel and zined</p>	<p>3</p>	<p>0.5</p>
	<p>HAMMER - For driving the anchors into ground, made of steel and wood</p>	<p>1</p>	<p>2.2</p>
	<p>BASE PLATE - For fixing the mast foot, made of steel, zined and painted</p>	<p>1</p>	<p>2.2</p>
	<p>WINCH 651 - For erecting and lowering the mast, made of steel, zined and painted</p>	<p>1</p>	<p>8</p>
	<p>GUYING ROPE - ZT-1 GUYING ROPE - ZT-2 Made of prestretched polyester wounded on a plastic reel</p>	<p>4 4</p>	<p>0.4 0.6</p>
	<p>MEASURING ROPE - MR7 Made of polyester rope wounded on a plastic reel</p>	<p>1</p>	<p>0.3</p>
	<p>EXTENSION TUBE 50/50 - For fixing the antenna, out. diam. 50 mm, made of aluminium tube and painted</p>	<p>1</p>	<p>1.1</p>